
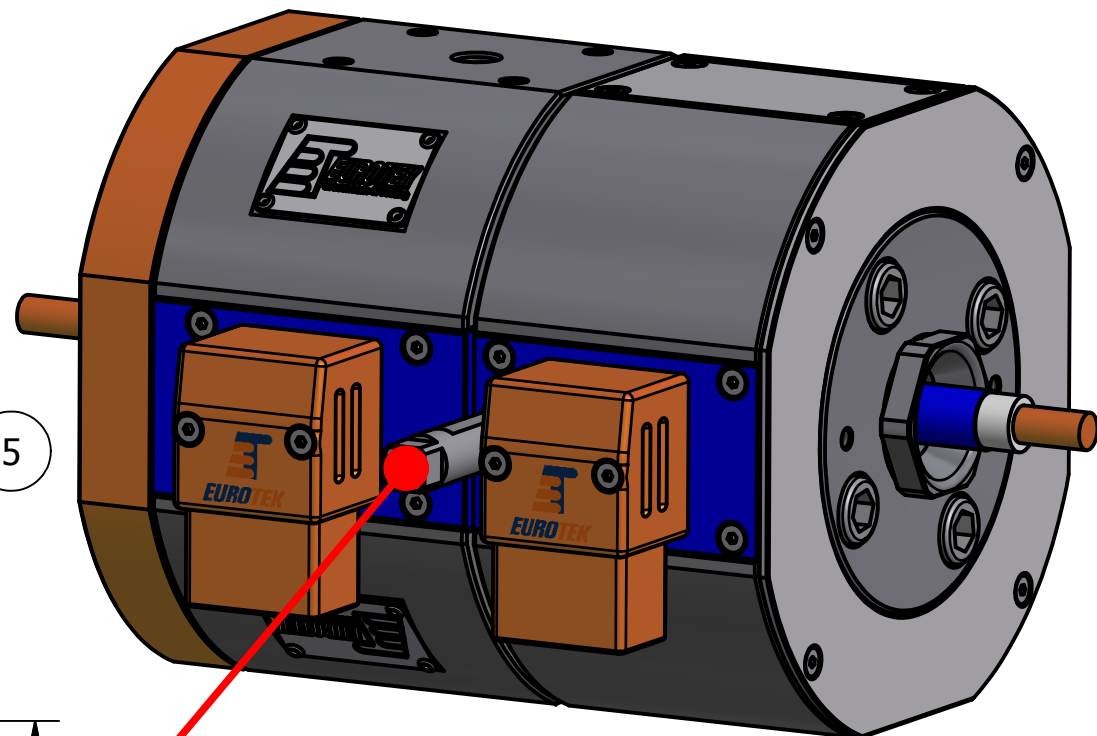


# CROSSHEAD ECF-20/SE


COEXTRUSION SELF-CENTERING

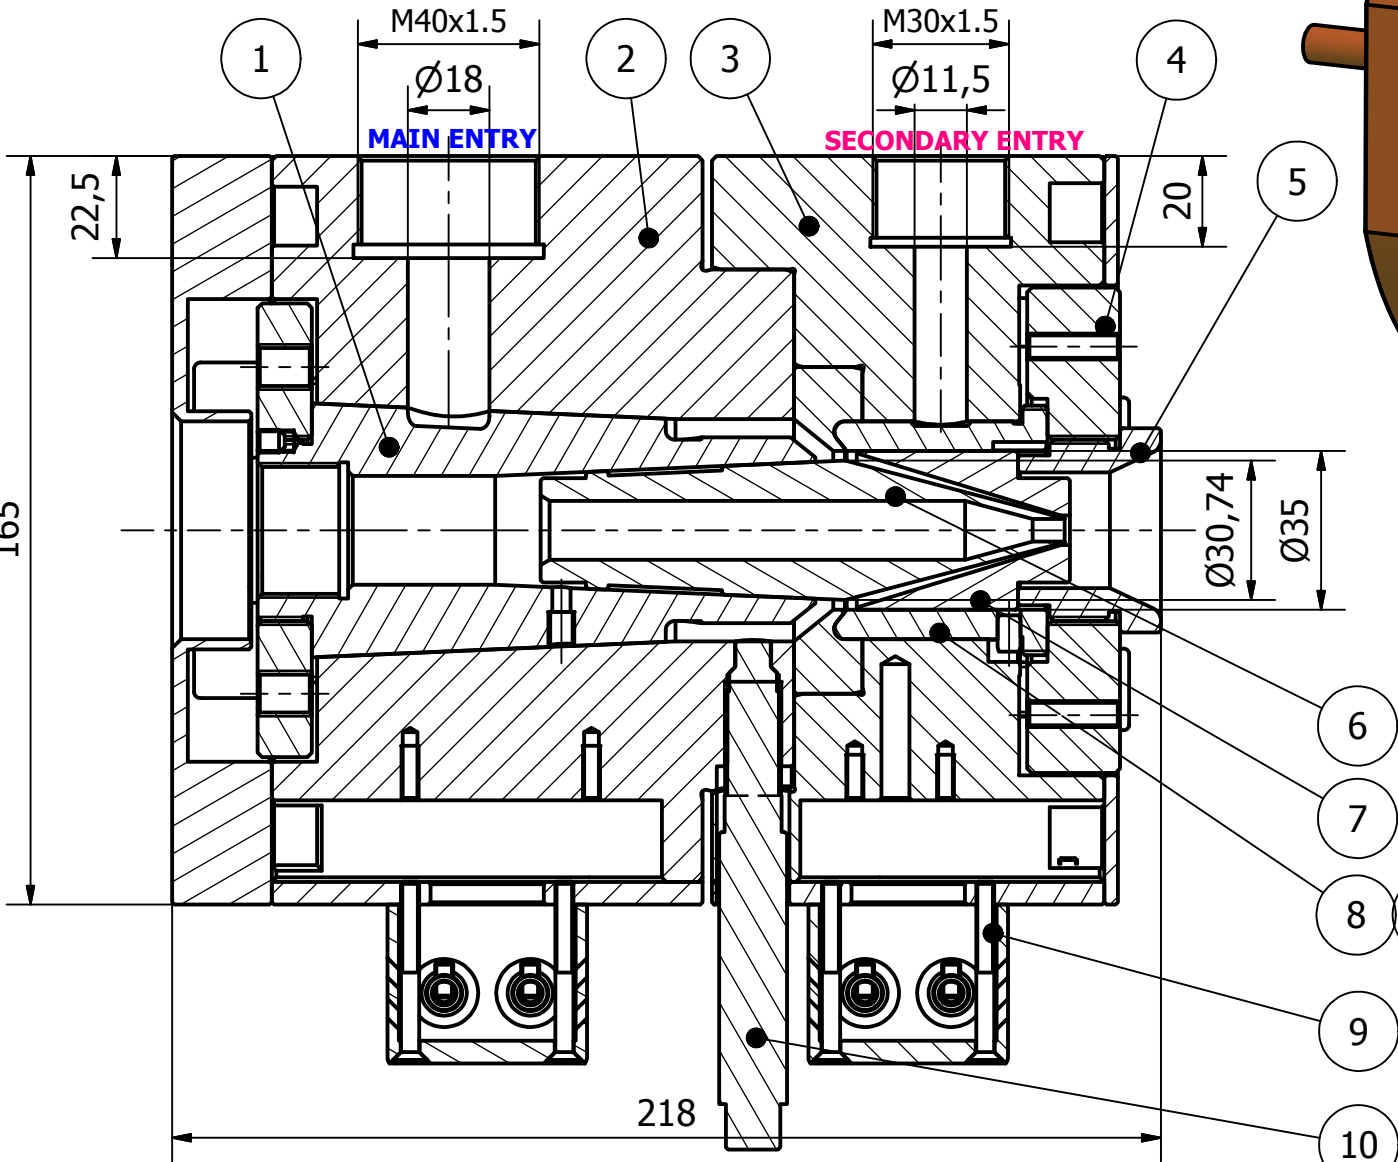

—●— PRESSURE CONTROL / TEMPERATURE

APPLICATIONS	
	SINGLE LAYER
	STRIPE
	SKIN
	FLAT CABLE

MAX CONDUCTOR: 12mm  
 MAX OVER INSULATION: 16mm  
 MAX TUBE DIE DIAMETER: 20mm

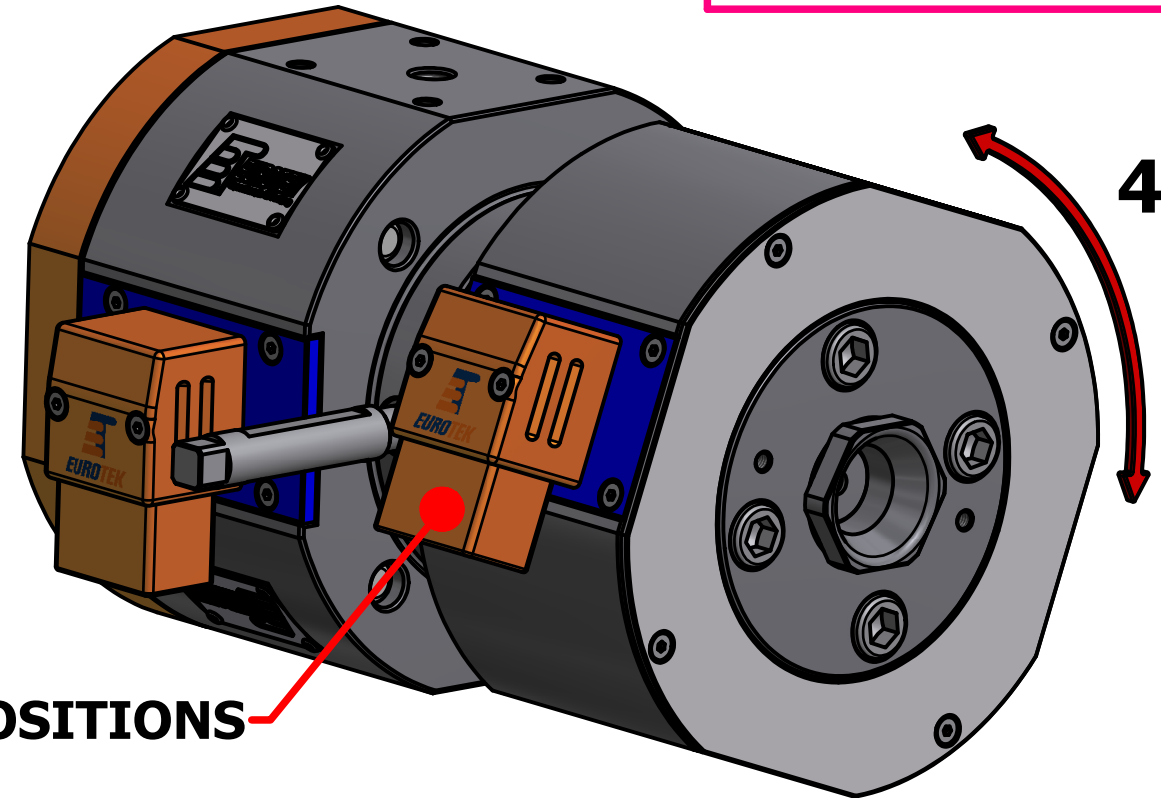

—●— MOUNTS IN 3 POSITIONS

ITEM	DESCRIPTION
1	CARTRIDGE
2	HEAD BODY WITH H. CARTRIDGES
3	HOLDING RING PLATE
4	HOLDING NUT FOR RING
5	ADJUSTING DIE NUT
6	TIP
7	DIE
8	NEUTRAL RING
8a	RING FOR STRIPE
8b	RING FOR SKIN
9	POWER CONNECTION
10	DYNISCO CAP

**ELECTRICAL POWER HEAD BODY ZONE: 1600W**  
**ELECTRICAL POWER DIE AREA: 1600W**



## CROSSHEAD ECF-20/SE

EUROTEK S.r.l.  
 66034 LANCIANO (Ch)- Italy  
 Phone:(+39) 0872 72581 FAX:(+39) 0872 711978  
 www.eurotek-italy.it  
 E-mail: info@eurotek-italy.it

